

Item # _____



RHP Hotplates



STANDARD FEATURES:

- ◆ Compact heavy gauge chassis for long life.
- ◆ Stainless steel sides, valve cover and plate ledge for easy cleaning.
- ◆ Double side panels for better insulation.
- ◆ 30,000 BTU cast iron burners featuring removable non-clog lift off heads with flat top design.
- ◆ Heavy cast iron 12" x 12" top grates with unique bowl design, level to the plate ledge so large pots are easily moved.
- ◆ Protected standing pilot for each burner to provide immediate safe ignition.
- ◆ Manual control for each burner.
- ◆ Full width removable crumb pan.
- ◆ 4" high adjustable heavy duty legs included.

RHP-24-4 Shown

OPTIONS:


- ◆ 10" diameter Stainless Steel wok rings to fit on top grate
- ◆ Interchangeable wok or saute burner heads
- ◆ Stainless steel stand with adjustable legs
- ◆ Casters for stand

Step up models also available (see specifications on the back)

Royal Hot Plates are user friendly, designed to last and easy to clean. They are made of heavy gauge stainless steel with a heavy gauge chassis. The heavy cast iron top grates and large plate ledge complement the work surface. Models ranging from one to eight open burners are available. The heavy duty cast iron top grates in 12" x 12" sections can be removed easily and safely. A protected standing pilot light for each burner provides immediate safe ignition.



Hot Plate Specifications

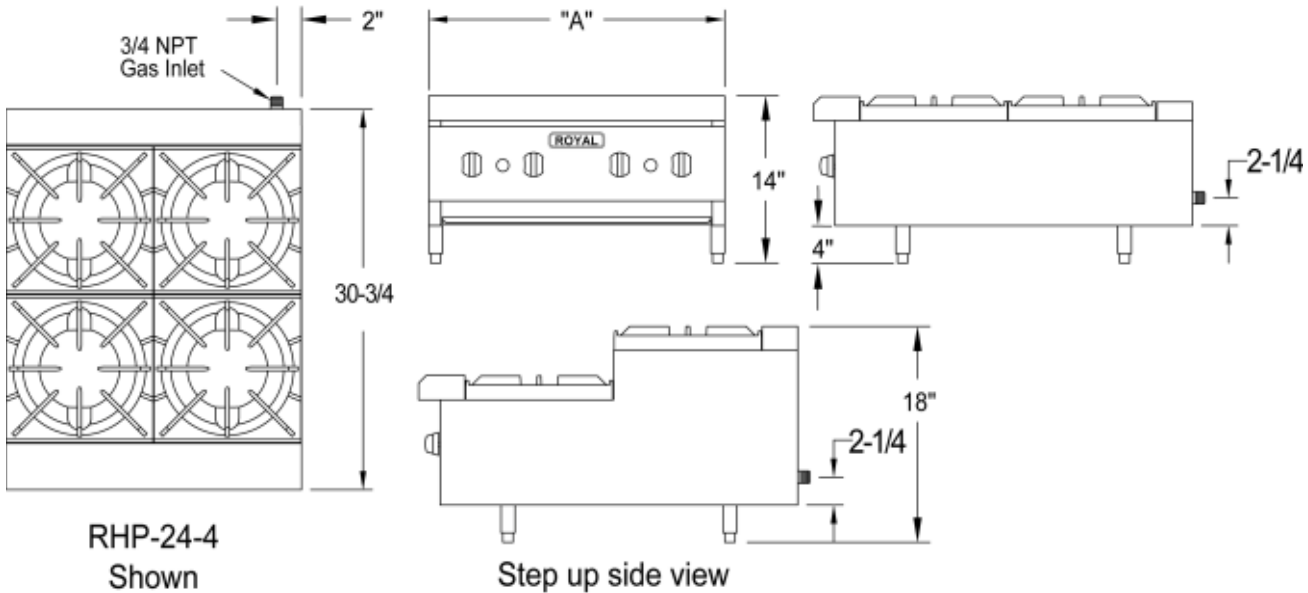

Standard Hot Plates					
MODEL NO.	WIDTH (A)	DEPTH	NUMBER OF BURNERS*	TOTAL BTU	SHIP WEIGHT
RHP-12-1	12"	15-3/4"	1	30,000	60 Lbs.
RHP-12-2	12"	30-3/4"	2	60,000	95 Lbs.
RHP-24-2	24"	15-3/4"	2	60,000	95 Lbs.
RHP-24-4	24"	30-3/4"	4	120,000	155 Lbs.
RHP-36-6	36"	30-3/4"	6	180,000	215 Lbs.
RHP-48-8	48"	30-3/4"	8	240,000	280 Lbs.
* Each burner is rated @ 30,000 BTU/hr					
Step-up Hot Plates					
MODEL NO.	WIDTH (A)	DEPTH	NUMBER OF BURNERS*	TOTAL BTU	SHIP WEIGHT
RHP-12-2SU	12"	30-3/4"	2	60,000	95 Lbs.
RHP-24-2SU	24"	30-3/4"	4	120,000	155 Lbs.
RHP-36-6SU	36"	30-3/4"	6	180,000	215 Lbs.
RHP-48-8SU	48"	30-3/4"	8	240,000	280 Lbs.
* Each burner is rated @ 30,000 BTU/hr					

Gas Connection: 3/4" NPT on the right hand rear of the appliance
The pressure regulator (supplied) is to be connected here by the installer.

Gas pressure: 5" W.C. - Natural Gas
10" W.C. - Propane

Combustible Clearances:
15 inches sides
6 inches rear

Non-combustible clearances:
0 inches sides
0 inches rear

Specify type of gas and altitude,
if over 2,000 feet, when ordering.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification